## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

### (19) World Intellectual Property Organization International Bureau



# 

#### (43) International Publication Date 14 October 2004 (14.10.2004)

**PCT** 

## (10) International Publication Number WO 2004/087443 A1

(51) International Patent Classification?: B60G 21/055

B60F 3/00.

Roy [GB/GB]; 19 Falmouth Close, Horeston Grange,

(21) International Application Number:

PCT/GB2004/001422

- (22) International Filing Date: 29 March 2004 (29.03.2004)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0307318.6

31 March 2003 (31.03.2003)


- (71) Applicants (for all designated States except US): GIBBS TECHNOLOGIES LTD. [GB/GB]; Avenue Road, Nuneaton, Warwickshire CV11 4LY (GB). GIBBS TECHNOLOGIES LTD.; La Motte Chambers, St. Helier, Jersey JE1 1BJ (GB).

Nuneaton, Warwickshire CV11 6GB (GB).

(74) Agent: BAIN SMITH, Timothy; Wickens Manor, Char-

ing, Nr Ashford, Kent, TN27 0DT (GB).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AB, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG. PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW. GH. GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-

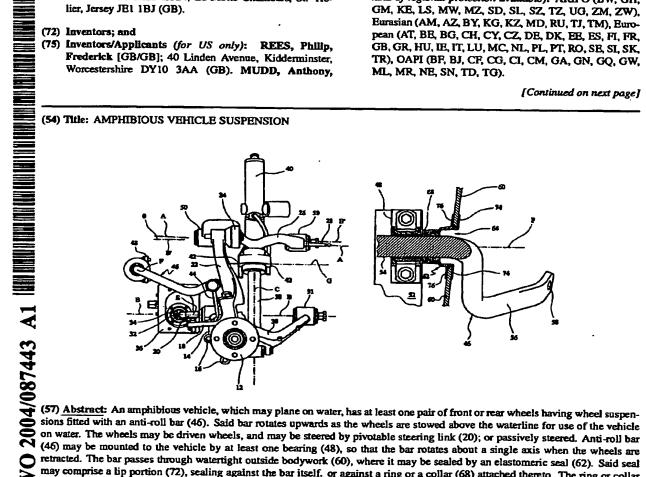

(46) may be mounted to the vehicle by at least one bearing (48), so that the bar rotates about a single axis when the wheels are retracted. The bar passes through watertight outside bodywork (60), where it may be sealed by an elastomeric seal (62). Said seal may comprise a lip portion (72), sealing against the bar itself. or against a ring or a collar (68) attached thereto. The ring or collar may be continuously welded around the anti-roll bar.